# 广东优叁新材有限公司
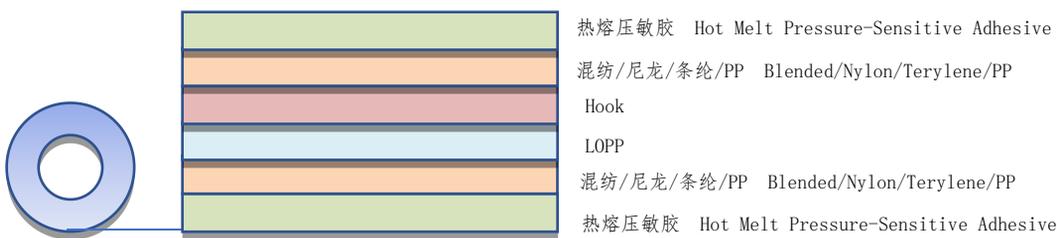## GUANGDONG YOUSAN NEW MATERIALS Co., Ltd

# 产品技术说明书
## Product technical specification

## 一. 产品描述Product Description

P10001 普通高粘背胶魔术贴是在魔术贴基础上背面涂覆高粘性热熔型压敏胶，在复合离型纸制作而成，其魔术贴材质可分为尼龙，PP，涤纶，混纺等，一部分是具有钩状细密钩子的面料，另一部分是具有绒毛状纤维的面料，适用于一般环境下的粘贴需求；

P10001 ordinary high-adhesion self-adhesive Velcro is made by coating the back of standard Velcro with a high-adhesion hot-melt pressure-sensitive adhesive and then laminating it with release paper. The Velcro material can be made from nylon, PP, polyester, blends, etc. One side consists of fabric with dense hook-shaped fibers, and the other side has fabric with fluffy fibers, suitable for general adhesion requirements in typical environments.

## 二. 产品结构 Product structure

热熔压敏胶　Hot Melt Pressure-Sensitive Adhesive

混纺/尼龙/条纶/PP　Blended/Nylon/Terylene/PP

Hook

LOPP

混纺/尼龙/条纶/PP　Blended/Nylon/Terylene/PP

热熔压敏胶　Hot Melt Pressure-Sensitive Adhesive

## 三. 主要用途 Main Use

✧ 用于固定遥控器、电线、插头等小物件、固定桌布、地毯等，防止滑动。固定车内小物件，如手机支架、车载香水、充电线等。适用于一般环境下的粘贴需求。

Used for securing small items such as remote controls, wires, and plugs, as well as fixing tablecloths and carpets to prevent slipping. It can also secure small items in the car, such as phone holders, car perfumes, and charging cables. Suitable for general adhesive needs in everyday environments.

## 四. 产品特性 Product Features

➢ 牢固快捷可重复拆卸，粘着力强，使用方便，具有保护性等。

Sturdy, quick, and can be repeatedly disassembled, with strong adhesion, easy to use, and protective.

## 五. 产品规格 Product specifications

➢ 宽：16㎜/20㎜/25㎜/30㎜/38㎜/50㎜/110㎜/120㎜/130㎜（长度可定制）

Width: 16mm/20mm/25mm/30mm/38mm/50mm/110mm/120mm/130mm (length customizable)

➢ 加工形式：支持冲型、分条等定制服务，适配不同尺寸和形状需求；

Processing types: Supports customized services such as punching and slitting, suitable for different size and shape requirements;

➢ 或其他定制

Other customization

## 六. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免阳光直射。存储温度为10-35℃，湿度为40～60%。

It is recommended to store it in a clean and dry place to prevent package damage and avoid direct sunlight. The storage temperature is 10-35 ℃ and the humidity is 40-60%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.